


■ Function*

Zener barrier to insulate process signals:

- 4/20mA transmitters
- Smoke detectors
- 4/20mA I/P positionners
- 4/20mA displays

*Non-exhaustive list. Contact us for more details

■ Type scheme

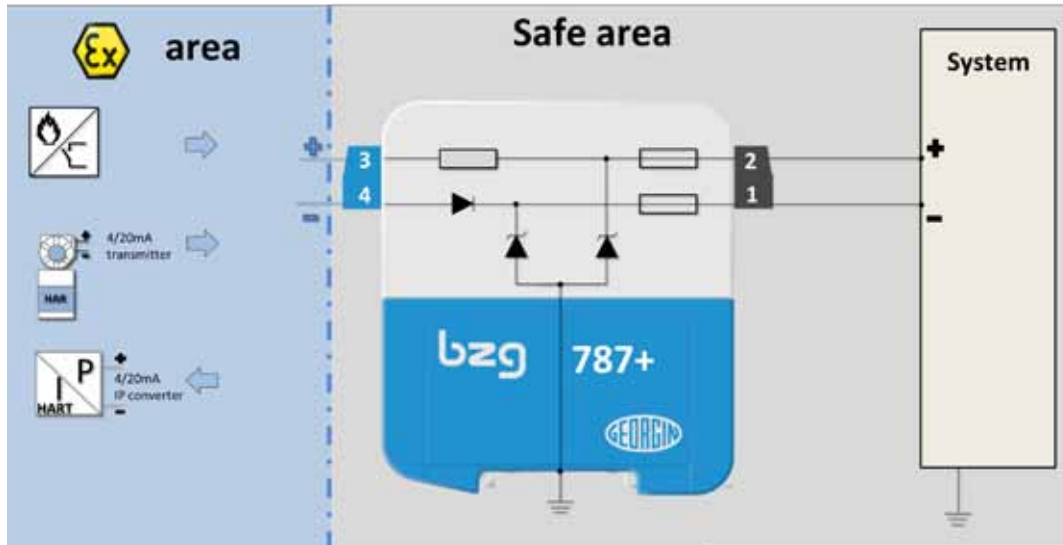

■ Metrological parameters

U(na) (V)	I(na) (mA)	Terminals	I(t) (µA)	U(e) (V)	Terminals	U(a) (V)	I _{fm} (mA)	RL (Ω)	Tol. +/- (%)	Pol.
24	45	2/T 1/T	10 10	24.90 24.90	2/3 1/4	26.8 26.8	50 50	341.3 0.9V+11.3Ω	5 -	+

- U(na): Maximum use voltage in Ex nA [ia] for a T4 class of temperature:-20°C / +60°C
- I(na): Maximum use current in Ex nA [ia] for a T4 class of temperature:-20°C / +60°C
- U(e): Voltage for which a leakage current lower or equal to I(t) is assured
- U(a): Maximum voltage input
- RL: Line resistance
- Tol: Tolerance of line resistance
- I_{fm}: Maximum current that can pass through the barrier (without destruction)
- T: Ground
- /: On

■ Intrinsic safety parameters

Terminals	R _o (Ω)	U _o (V)	I _o (mA)	P _o (mW)	Lo IIC (µH)	Co IIC (µF)	L/R IIC (µH/Ω)	Lo IIB (µH)	Co IIB (µF)	L/R IIB (µH/Ω)
3/T	313.5	27.30	87.08	594.33	4688.75	0.088	59.82	18755.01	0.683	239.30
4/T	-	0.00	0.00	0.00	-	-	-	-	-	-
3/4	313.51	28	89.31	625.20	4457.24	0.083	56.87	17828.98	0.65	227.48
3//4/T	313.5	27.30	87.08	594.33	4688.75	0.088	59.82	18755.01	0.683	239.30


T: Ground //: Parallel /: On

■ Certifications

ATEX certificate:	11ATEX0024X
IECEX certificate:	INE 11.0009X
Marking:	CE0081 II (1) GD [Ex ia Ga] IIC ou [Ex ia Ga] IIB ou [Ex iaD Da] IIIC CE0081 II 3 (1) G Ex nA [ia Ga] IIC T4 Gc
ATEX	EN 60079-0 / EN 60079-11 / EN 60079-15 / EN 61241-11 / EN 61241-0
IECEX	IEC 60079-0 / IEC 60079-11 / IEC 60079-15 / IEC 61241-11 / IEC 61241-0
C.E.M.	EN 61326-1 & IEC61000-6-2
D.B.T.	NFC 15-100
SIL	EN 61508 (SIL 2 or SIL 3 according to application)

■ Mechanical features

Material	Polycarbonate
Weight	≈200g
Mounting	On Din-rail
Stockage T°	-25 to 70°C
Operating T°	-20° to 60°C
Relative humidity	5 to 80% without condensation
Protection index	IP 20
Size:	

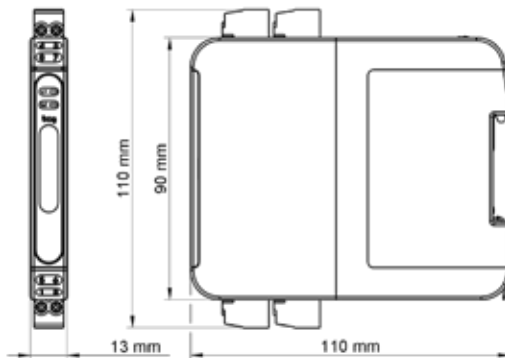

■ Electrical wiring

Electrical wiring	Removable screw terminals for 0.2 to 2.5mm ² cable
Marking	Blue terminals for the ATEX area Black terminals for the safe area
Ground wiring	Fix screw terminal for 4mm ² cable

■ Location

Safe area
Zone 2 in an IP 54 housing (minimum)

■ Options

Led in front: no
Removable lable holder: yes
Din-rail isolator: contact us