




Data sheet

Janitza electronics GmbH
Vor dem Polstück 6
35633 Lahnbau | Germany
Support +49 6441 9642-22
info@janitza.com | www.janitza.com

Janitza®

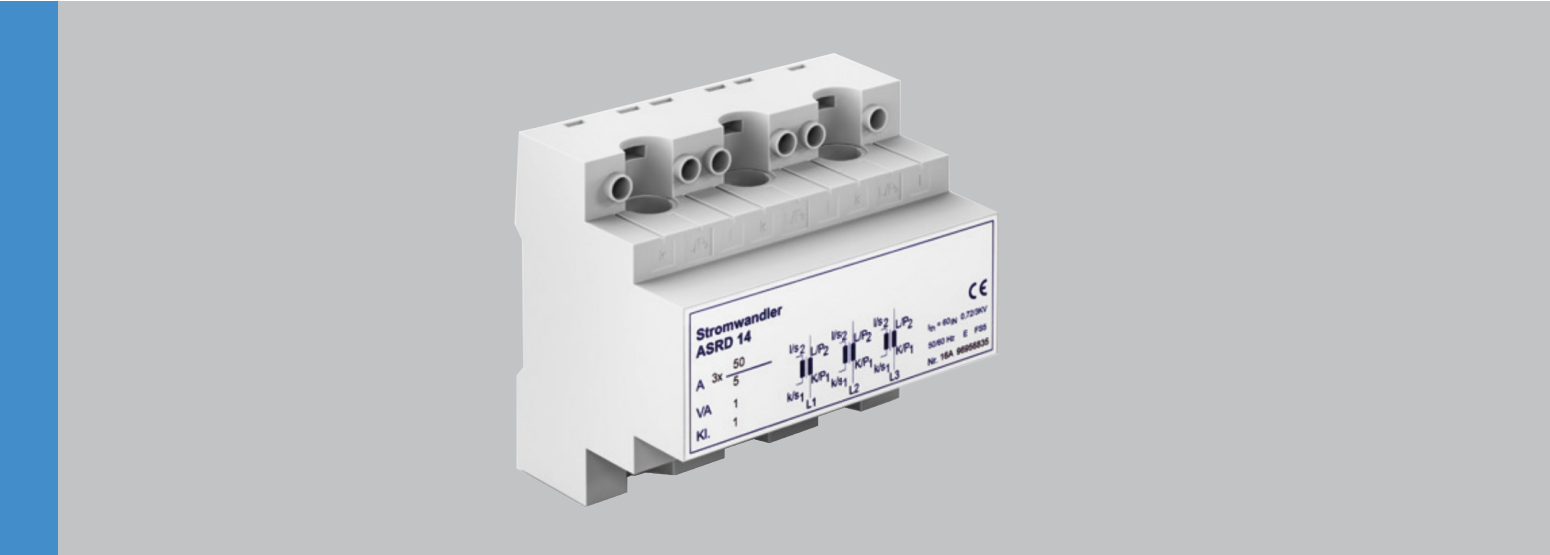

TECHNICAL DATA

Type	Primary current	Secondary current	Rated power	Class
ASRD 14	50 A	5 A	1 VA	1
ASRD 14	75 A	5 A	1.5 VA	1
ASRD 14	100 A	5 A	2.5 VA	1
ASRD 14	125 A	5 A	2.5 VA	0.5
ASRD 14	150 A	5 A	2.5 VA	0.5

Specification	Data
Weight approx.	500 g (1.1 lb)
Connection	Screw connection M5x10 mm
Frequency	50 Hz
Insulation test voltage	3 kV, U_{rms} , 50 Hz, 1 min.
Operating temperature	-5 °C to 50 °C (23 °F to 122 °F)
Storage temperature	-25 °C to 70 °C (-13 °F to 158 °F)
Standards	DIN EN 61869-1/2, DIN EN 42600-1/2
Insulation class	E
Implementation primary conductor	13.5 mm round conductor
Operating voltage U_m	0.72 kV
Rated short-time current I_{th}	$60 \times I_{pr}$, 1 Sek.
Rated continuous current I_{cth}	$1.0 \times I_{pr}$

Janitza[®]

Janitza electronics GmbH
Vor dem Polstück 6 | 35633 Lahnau
Germany

Tel. +49 6441 9642-0
info@janitza.com | www.janitza.com